




STAGE COLOR 1200 SV - Standard lens only (14.3° 10% - 7° 50%)

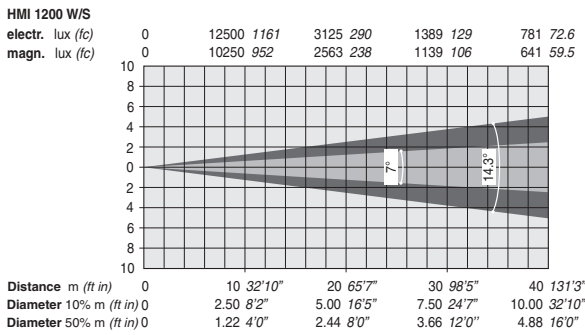


STAGE COLOR 1200 SV - With light frost (22.2° 10% - 12.9° 50%)

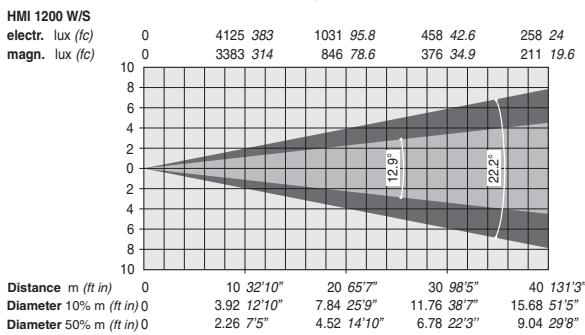


STAGE COLOR 1200 SV - With medium frost (28.3° 10% - 16.9° 50%)

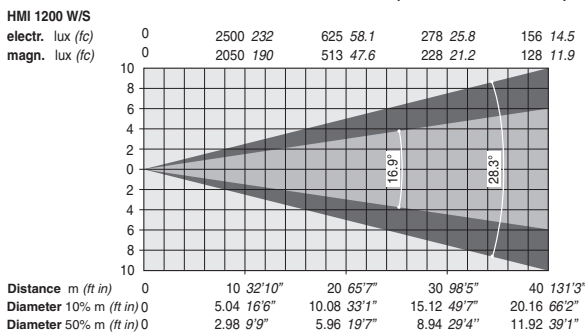

STAGE COLOR 1200 SV - With heavy frost (31° 10% - 18.6° 50%)

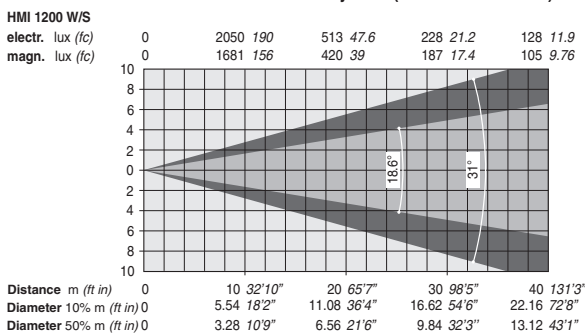

STAGE COLOR 1200 SV - With color CYC (80° 10% - 45° 50%)

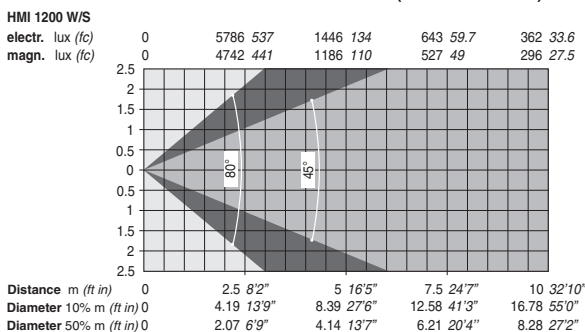

Legenda

Electr. (Lux) / magn. (Lux): valori d'illuminamento massimo con ballast elettronico/magnetico.
Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.

Key

Electr. (Lux) / magn. (Lux): maximum illumination with electronic/magnetic ballasts.
Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.

Légende

Electr. (Lux) / magn. (Lux): valeurs d'éclairage maximum avec ballast électronique/magnétique.
Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.

Legende

Electr. (Lux) / magn. (Lux): Lichtstärke mit elektronischem bzw. Elektromagnetischem Ballast.
Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.

Legenda

Electr. (Lux) / magn. (Lux): Valores de iluminación máxima con balasto electrónico/magnético.
Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.