


STAGE ZOOM 1200 SV - Minimum Zoom (15.9°)


HMI 1200 W/S					
electr. lux (fc)	0	2433 226	608 56.5	270 25.1	152 14.1
magn. lux (fc)	0	1995 185	499 46.3	222 20.6	125 11.6

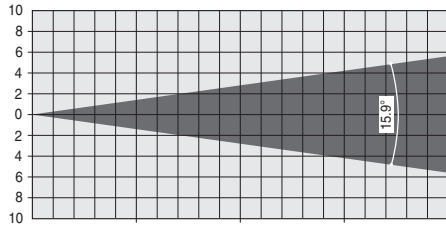

Distance m (ft in)	0	10 32'10"	20 65'7"	30 98'5"	40 131'3"
Diameter m (ft in)	0	2.80 9'2"	5.60 18'4"	8.40 27'7"	11.20 36'9"

STAGE ZOOM 1200 SV - Maximum Zoom (23.7°)


HMI 1200 W/S					
electr. lux (fc)	0	1165 108	291 27.1	129 12	73 6.76
magn. lux (fc)	0	955 88.7	239 22.2	106 9.86	60 5.54

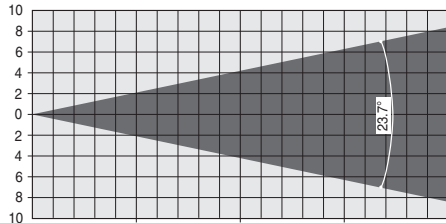

Distance m (ft in)	0	10 32'10"	20 65'7"	30 98'5"	40 131'3"
Diameter m (ft in)	0	4.20 13'9"	8.40 27'7"	12.60 41'4"	16.80 55'1"

STAGE ZOOM 1200 SV - Minimum Zoom with frost 100% (26.6° 10% - 15.7° 50%)


HMI 1200 W/S					
electr. lux (fc)	0	3440 320	860 79.9	382 35.5	215 20.0
magn. lux (fc)	0	2820 262	705 65.5	313 29.1	176 16.4

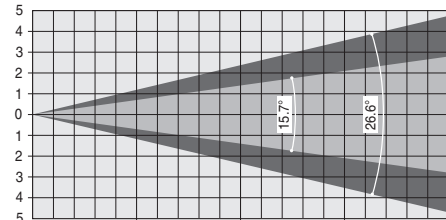

Distance m (ft in)	0	5 16'5"	10 32'10"	15 49'3"	20 65'7"
Diameter 10% m (ft in)	0	2.37 7'9"	4.73 15'6"	7.10 23'3"	9.46 31'0"
Diameter 50% m (ft in)	0	1.38 4'6"	2.76 9'1"	4.13 13'7"	5.51 18'1"

STAGE ZOOM 1200 SV - Maximum Zoom with frost 100% (42.7° 10% - 23.4° 50%)

HMI 1200 W/S					
electr. lux (fc)	0	1633 152	408 37.9	181 16.9	102 9.48
magn. lux (fc)	0	1339 124	335 31.1	149 13.8	84 7.77

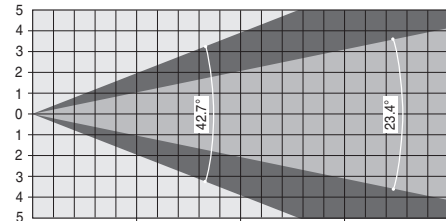

Distance m (ft in)	0	5 16'5"	10 32'10"	15 49'3"	20 65'7"
Diameter 10% m (ft in)	0	3.91 12'10"	7.82 25'8"	11.72 38'6"	15.63 51'3"
Diameter 50% m (ft in)	0	2.07 6'9"	4.14 13'7"	6.20 20'4"	8.27 27'2"

Legenda

Electr. (Lux) / magn. (Lux): valori d'illuminamento massimo con ballast elettronico/magnetico.
Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.

Key

Electr. (Lux) / magn. (Lux): maximum illumination with electronic/magnetic ballasts.
Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.

Légende

Electr. (Lux) / magn. (Lux): valeurs d'éclairage maximum avec ballast électronique/magnétique.
Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.

Legende

Electr. (Lux) / magn. (Lux): Lichtstärke mit elektronischem bzw. Elektromagnetischem Ballast.
Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.

Legenda

Electr. (Lux) / magn. (Lux): Valores de iluminación máxima con balasto electrónico/magnético.
Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.