



# Uno

## Technical Data Sheet


### Features

- Ultra Fast Motion
- Incredibly Bright
- High Efficiency Narrow Optics
- Fast Service Design
- Modular Construction
- Electronic Cooling System Control
- Full Color LCD Display W/ Battery Mode
- RDM Compatible
- Control Options- DMX 512/RDM
- DMX Channels- 15

- Pan- 540°
- Tilt- 270°
- Max Speed Pan (360°)- 0.79s
- Max Speed Tilt (252°)- 0.60s
- 5-Pin DMX/RDM Connector
- "PowerCON TRUE1" Connector
- Molded Foam Packing Inserts Included
- LED Type- 60 W Osram RGBW COB
- LED Hours- 70% Luminous output, 50,000 hrs.



### Projection Chart

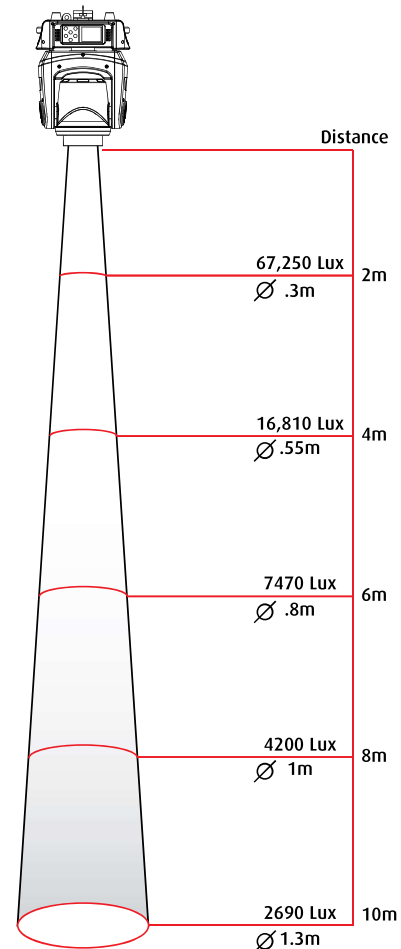

### Optical & Photometrics

- Beam Angle- 3.5 degrees
- Lens- Custom High Efficiency TIR
- Lens Diameter- 106mm
- Lens "Snoot"
- LED Engine- RGBW

Lumens*-	2000
Center Lux @ 7m-	5500
Color Temperature-	6500K

\* Lumens as measured by Everfine 2.0 integrating sphere and PMS-80 spectrophotometer. Calibration date March 3, 2014




## Electrical

Fixture Rated Power- 125W  
Auto Switching Power Supply

Input Power Rating- AC 100V - 240V 50/60 Hz  
1.25-0.52 Amps

## Dimensions / Physical

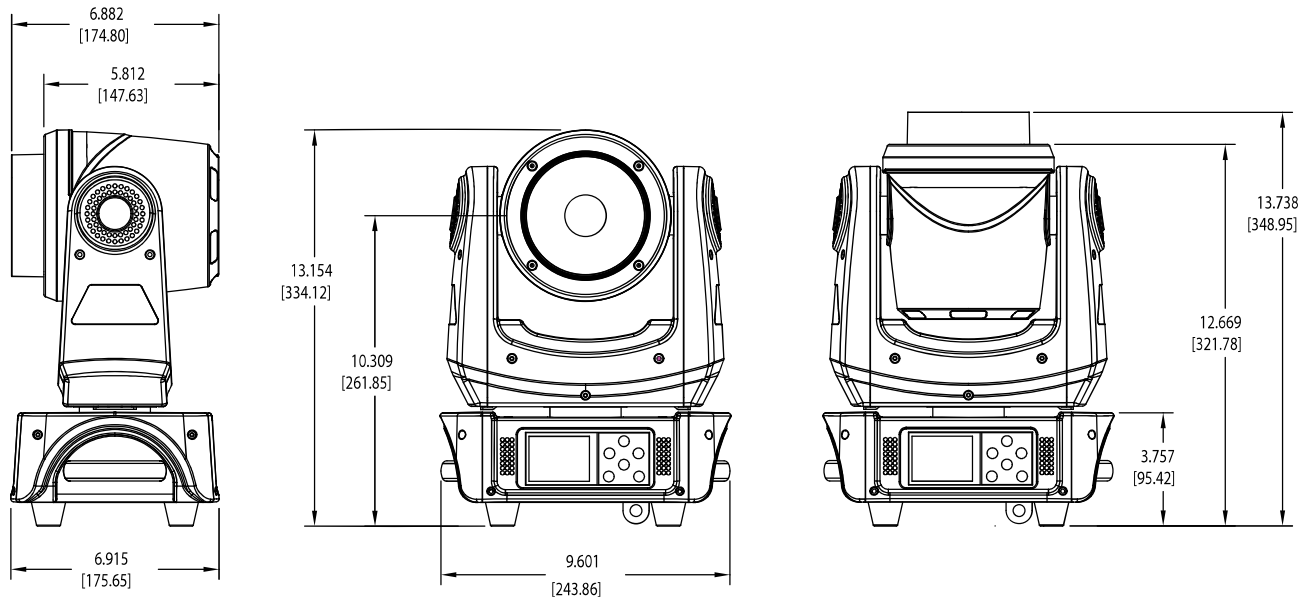

Fixture Weight- 6 Kg (13 Lbs.)

Shipping Weight- 10 Kg (22 Lbs.)

Box Dimensions- (L x W x H)

315 mm (12.4 in.) x 245 mm (9.65 in.) x 460 mm (18.1 in.)

Minimum Distance to Flammable Objects- 0.5m (1.64 ft)

Minimum Distance to Lighted Objects- 1.5m (4.9 ft.)

Operating Temperature- 0 - 45°C (32 - 113°F)

Storage Temperature- -20 - 60°C (0 - 140°F)

Compliance Approvals- CE, ETL

### Mounting Options-

The fixture can be truss mounted using 1/4 camlock C-clamp mounting brackets. It can also stand upright on a stable surface.

Available Colors- Black

HES PN- H7010018

