



Photometric Data

Specifications are subject to change without any prior written notice.

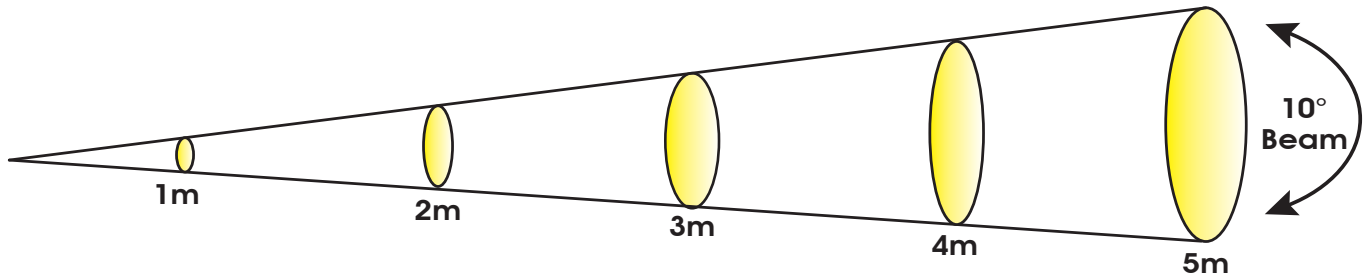

	1 m	3.3 ft	2 m	6.6 ft	3 m	9.8 ft	4 m	13.1 ft	5 m	16.4 ft
10° Beam Diameter	0.36	1.2	0.54	1.8	0.7	2.3	0.95	3.1	1.1	3.6
	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
RED LEDs	8,500	790	4,200	390	1,700	158	970	90	620	58
GREEN LEDs	26,000	2,415	10,800	1,003	5,000	465	2,700	251	1,700	158
BLUE LEDs	8,800	818	380	35	160	15	90	8	63	6
WHITE LEDs	31,500	2,926	14,000	1,301	6,000	557	3,300	307	2,100	195
FULL ON	65,000	6,039	29,500	2,741	12,600	1,171	6,900	641	4,400	409

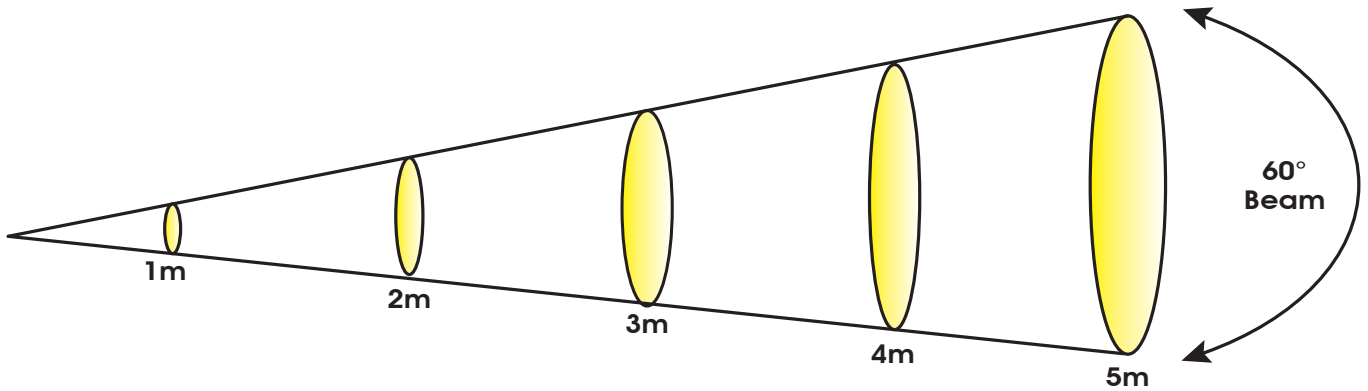

	1 m	3.3 ft	2 m	6.6 ft	3 m	9.8 ft	4 m	13.1 ft	5 m	16.4 ft
60° Beam Diameter	1.7	5.6	3.00	9.8	4.4	14.4	5.8	19.0	7.5	24.6
	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
RED LEDs	1,000	93	2,800	260	130	12	220	20	55	5
GREEN LEDs	3,000	279	800	74	380	35	10	1	140	13
BLUE LEDs	1,100	102	31	3	16	1	250	23	8	1
WHITE LEDs	3,600	334	951	88	460	43	540	50	170	16
FULL ON	7,200	669	2,000	186	900	84	6,900	641	360	33

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu