




VOLT Q3™

SKU# VOL032

The new IP65 rated Volt Q3™ features (3) 15W QUAD color RGBW LEDs, 7° beam 13° field angles, 180°+ manual LED head positioning, variable color correction (2,700K - 7,200K), magnetic frost filter gel frame, electronic strobe and dimming, flicker free operation for TV and FILM, rugged die-cast aluminum exterior, rubber padded base, retractable carrying handle, an internal wireless EWDMX receiver, and powered by a rechargeable Lithium-Ion battery.

FEATURES

- IP65 Rated**
- 7° Beam 13° Field Angles**
- (3) 15W QUAD Color RGBW LEDs**
- 180°+ Manual LED Head Positioning**
- Variable Color Correction (2,700K - 7,200K)**
- Magnetic Frost Filter Gel Frame**
- Electronic Strobe and Dimming**
- Internal Wireless EWDMX Receiver**
- Rechargeable Lithium-Ion Battery**
- Flicker Free Operation for TV and FILM**
- Rugged Die-Cast Aluminum Exterior**
- Rubber Padded Base and Retractable Carrying Handle**

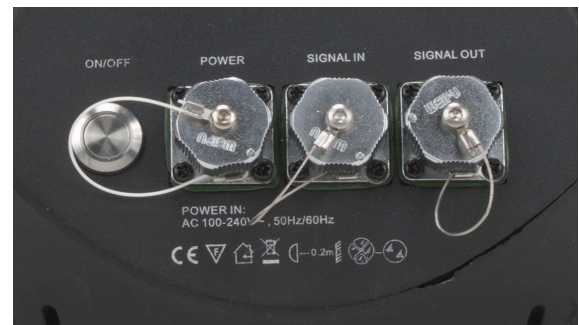

Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

PRODUCT SPECIFICATIONS

FEATURES

- IP65 Rated
- 7° Beam and 13° Field Angles
- 180°+ Manual LED Head Positioning
- Variable Color Correction (2,700K - 7,200K)
- Internal Wireless EWDMX Receiver
- Rechargeable Lithium-Ion Battery
- Flicker Free Operation for TV and FILM
- Rugged Die-Cast Aluminum Exterior
- Rubber Padded Base and Retractable Carrying Handle

SOURCE

- (3) 15W QUAD Color RGBW LEDs
- 100,000 Hour Average Life

PHOTOMETRIC DATA

8,920 LUX 829 FC @6.6 ft (2m) (7° Full ON)

EFFECTS

- Variable Color Correction (2,700K - 7,200K)
- Magnetic Frost Filter Gel Frame
- Electronic Strobe and Dimming
- Multiple Color and Chase Macros

CONTROL / CONNECTIONS

- (4) DMX Channel Modes (4 / 5 / 7 / 9)
- Internal Wireless EWDMX Receiver
- (4) Button Control Panel
- LCD Menu Display
- 3pin IP DMX In/Out
- 2pin IP Power Charger In

SIZE / WEIGHT

- Length: 9.8" (250mm)
- Width: 8.5" (215mm)
- Vertical Height: 10.9" (276mm)
- Weight: 13.0 lbs. (5.9 kg)

ELECTRICAL / THERMAL

- DC 13-17.5V
- 40W Max Power Consumption (each unit)
- 14°F to 113°F (-10°C to 45°C)

APPROVALS / RATINGS

CE | cETLus | IP65


INSTALLATION

- Rigging: Clamps (Not Included) / Floor
- Working Position: Any (360°)

INCLUDED ITEMS

- (1) Volt Q3 17.5 VDC Charger + IEC Power Cable
- (1) Volt Series 3pin IP Data Link Cable
- (1) Volt Series 3pin IP to 3pin DMX Data Input Cable
- (1) Magnetic Frost Filter
- (1) Omega Bracket
- (1) Safety Cable


PHOTOMETRIC DATA

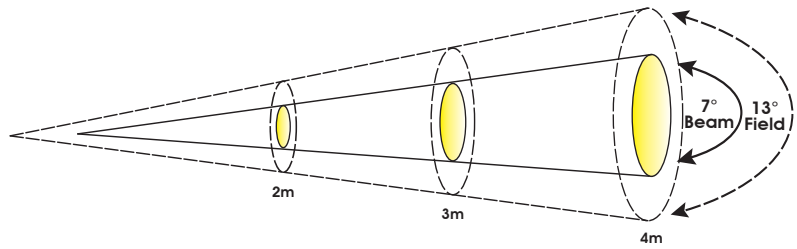

	m	ft	m	ft	m	ft
Distance	2	6.6	3	9.8	4	13.1
7° Beam Diameter	0.26	0.9	0.38	1.2	0.51	1.7
13° Field Diameter	0.47	1.5	0.68	2.2	0.92	3.0

Photometrics	lux	fc	lux	fc	lux	fc
RED LEDs	1,460	136	625	58	355	33
GREEN LEDs	3,567	331	1,609	149	930	86
BLUE LEDs	490	46	220	20	126	12
WHITE LEDs	4,508	419	1,970	183	1,127	105
FULL ON	8,920	829	3,892	362	2,193	204

DIMENSIONAL DIAGRAMS

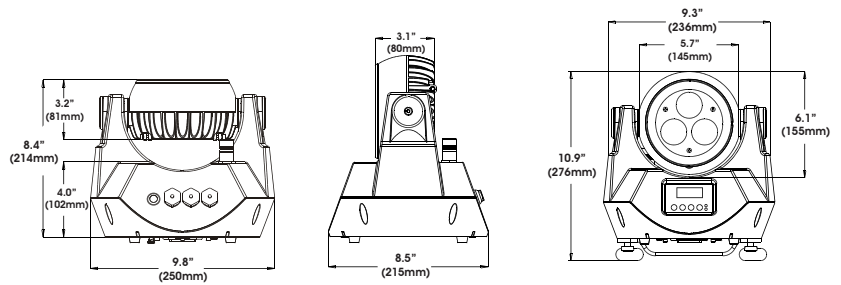

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
EWDM01	EWDMX IP Wireless IP65 DMX Transceiver
VOLT3CHARGER	Volt Q3 17.5 VDC Charger + IEC Power Cable
VOLT/3MDLC	Volt Series 9.8 ft (3m) 3pin IP Male to 3pin IP Female DATA LINK Cable
VOLT/DIAC	Volt Series 9.8 ft (3m) 3pin IP Female to 3pin DMX Male DATA INPUT Cable
VOLT/DOAC	Volt Series 9.8 ft (3m) 3pin IP Female to 3pin DMX Female DATA Output Cable



Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu