



Revised September 26, 2017

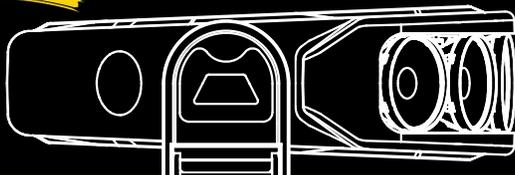


Features

- Modular Construction
- Fast Service Design
- Electronic Cooling System Control
- Lens- High Efficiency TIR (6X)
- Lens Diameter- 106mm
- LED Type- 60W RGBW (6x)
- LED Hours- 70% Luminous output, 50,000 hrs.
- X Module Control (6X)
- Pan- 540 °
- Tilt- 220 °
- Indigo Backlighter- 35 1W LED's
- Active Thermal Control
- RDM Compatible
- Control Options- DMX 512/RDM
- DMX Channels- 64
- Macros- 100, RGB CMY Invert
- 5-Pin DMX/RDM Connector
- PowerCON TRUE1 Connectors
- Full Color LCD Display W/ Battery Mode
- Compliance Approvals- CE, ETL

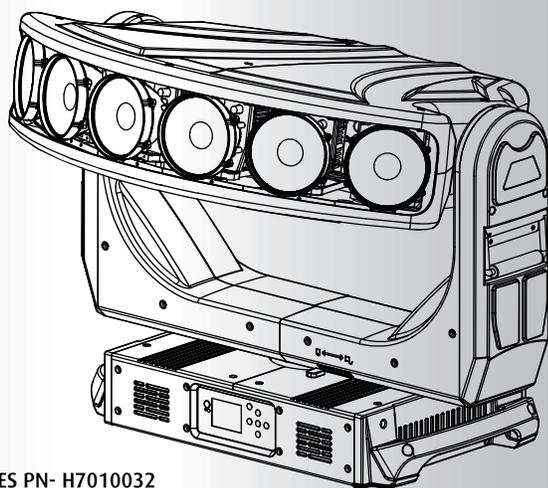

HES PN- H7010032

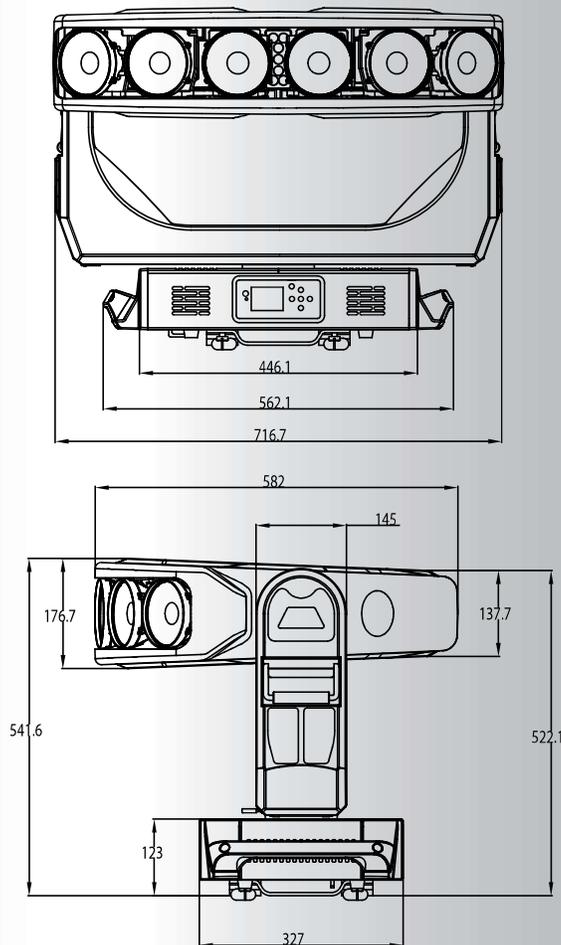

Pan and Tilt Locks

Integrated Yoke Arm Handles

Road Case Included (Single)

Fixture Weight- 41 Kg (90 Lbs.)

Road Case Gross / Shipping Weight- 93 Kg (205 Lbs.)

Road Case Dimensions- (L x W x H)-

- 838 mm (33 in.) x 711 mm (28 in.) x 914 mm (36 in.)

Minimum Distance to Flammable Objects- 2m (6.56 ft)

Minimum Distance to Lighted Objects- 2m (6.56 ft.)



Photometrics

RGBW Lumens-	12000
Center Lux @ 7m-	33000
Color Temperature-	6500K

Electrical

Input Power- AC 100V - 240V 50/60 Hz	7.3 - 3 Amps
Auto Switching Power Supply	
Db(A)- 45	

Mounting Options- The fixture can be truss mounted using 1/4 camlock C-clamp mounting brackets. It can also stand upright on a stable surface.