


A
B
C
D
E
F
G
H
I

1	2	3	4	5	6	7	8	9
版本:A0	区域	修改内容	公差等级(未注)	发行日期				
			GB/T1804—2000 f级	2015-02-12				

SN.	PART CODE	DRAFT NO.	ITEM NO.	QTY
1	7060000005B	LA3140-02	front cover	1
2	7030200019	LA3140-04	waterproof silicone rope A	1
3	5070000012	LA3140-05	toughened glass	1
4	7010200478B	LA3159-28A-03	the fixing plate for lens	1
5	5050100008	DB007	lens	12
6	7020300001	LA3155-02	copper pillar2 (long)	5
7	8010038900	LA3156-01E-001	driver PCB	1
8	7020300000	LA3155-01	copper pilllar 1 (short)	5
9	5020100039	TX-BGRWPY10B120-001C	LED	12
10	8010038800	LA3156-03D-001	LED PCB	1
11	7060100013B	LA3140-01	light housing	1
12	7020202004		washer: $\phi 13*\phi 20*2.8\text{MM}$	4
13	7030200037		glue: $\phi 22\times\phi 8\times 3$	4
14	7010300071B	LA3159-28A-04	bracket A	1
15	7020200006		flat washer: $\phi 8*\phi 17*1$	2
16	7010300072B	LA3159-28A-05	bracket B	1
17	7020001035		head cup inner hexagon: M8X30	2
18	7020600002	LA3155-28A-03	"S" knob (M8×25)	2
19	7010200471B	LA3153-01	barndoor	1
20	8010027703	LADMX-08B-004	3P+5P XLR socket	1
21	7010200490A	LA3401-10	pressing plate	2
22	8010023205	LA1119A-02F-006	display PCB	1
23	6120300000	NAC3MPB-1	powercon out	1
24	5040000044	K26H-UP150S24	PSU	1
25	5070100005	LA1114-12	PC for display	1
26	6060400000	KSD301	temp control switch	1
27	6120200000	NAC3MPA-1	powercon in	1
28	6120100002	R3-54B	fuse holder	1
29	7010200472B	LA3153-02	cover plate	1
30				

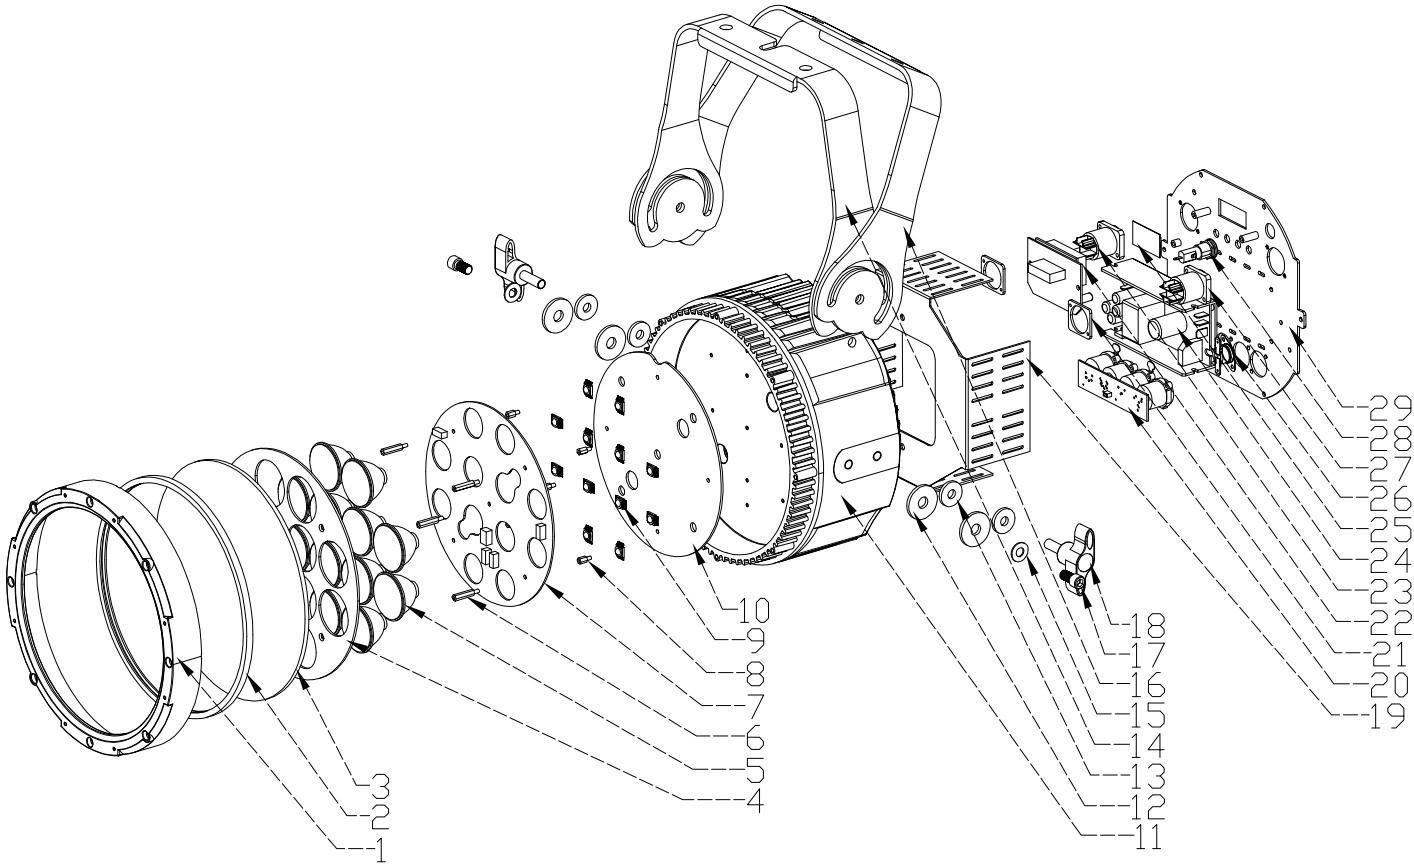

GB/T1804—2000 线性尺寸的极限偏差数值							
范围(mm)	0.5~3	3~6	6~30	30~120	120~400	400~1000	1000~2000
f (精密)	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5
m (中等)	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2
e (粗糙)	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3
v (最粗)	±0.5	±1	±1.5	±2.5	±4	±6	±8

名称				折弯	折弯角	喷漆厚度	
尺寸范围(mm)				0~50	50~300	>15°	单边0.08 双边0.12
未注公差(mm)				±0.1	±0.25	±1°	0.02

ITEANGLE™ 广州鹏林照明灯具有限公司							
制图	黄俊杰	2015-02-12	名称	产品爆炸图		数量: 1	材料: 组件
核对						表面处理:	比例: 1:1/CAD
审核			图号	LA3156-28A-BZ-00		版 本	A0
批准						第 1 页/共 1 页	