

CUEPIX BLINDER WW2™


SKU# CUE265



Photometric Data

Specifications and improvements in the design of this unit are subject to change without any prior written notice.

FULL ON 548 FC / 5900 LUX 127 FC / 1370 LUX 59 FC / 635 LUX 37 FC / 396 LUX 25 FC / 264 LUX LUX x 0.0929 = FC

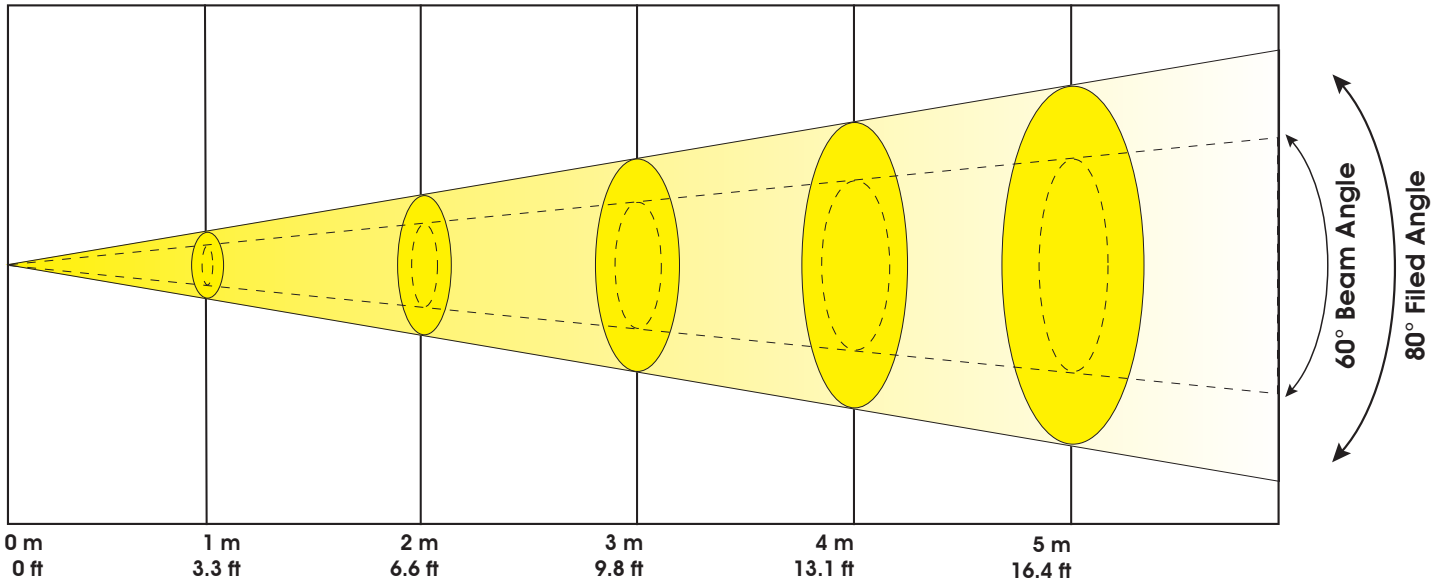

Max Beam Diameter

60° Beam Angle	Ø 1.4 m / Ø 4.4 ft	Ø 2.4 m / Ø 7.7 ft	Ø 3.5 m / Ø 11.3 ft	Ø 4.6 m / Ø 15.1 ft	Ø 5.8 m / Ø 18.9 ft
80° Field Angle	Ø 2.0 m / Ø 6.5 ft	Ø 3.4 m / Ø 11.0 ft	Ø 5.0 m / Ø 16.5 ft	Ø 6.7 m / Ø 22.0 ft	Ø 8.4 m / Ø 27.6 ft

ELATION | CUEPIX BLINDER WW2™ | Photometric Data

Elation Professional USA - Corporate Headquarters | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional Florida | 13185 NW 47th Ave. | Miami Gardens, FL. 33054

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu