



CUEPIX STRIP WW™

SKU# CUE277

The new CUEPIX Strip WW™ is a bar luminaire with (5) individual 30W Warm White 3,200K COB LEDs producing a 60° beam angle. Features include individual pixel control, strobe and zone chase effects, selectable dimming curves, DMX and RDM (Remote Device Management) support, 3/5pin XLR and powerCON in/out connections, (4) button LCD menu display control, 123W max power consumption, and a multi-voltage universal auto switching power supply (100-240v).

FEATURES

60° Beam Angle 3,200K Bar Luminaire

(5) Pixel Controlled 30W Warm White COB LEDs

Strobe and Zone Chase Effects

Selectable Dimming Curve Effects

DMX and RDM (Remote Device Management) Support

Flicker Free Operation for Broadcast TV and FILM

Integrated Rigging Bracket

Optional 15° Lens Kit Available



Optional 15° Lens Kit



Specifications are subject to change without notice ©Elation Professional 07/15

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

PRODUCT SPECIFICATIONS

SOURCE

(5) 30W Warm White 3,200K COB LEDs
100,000 Hour Average Lamp Life

PHOTOMETRIC DATA (60° Full ON)

2,990 LUX 278 FC @3.3' (1m)
813 LUX 76 FC @6.6' (2m)
500 LUX 46 FC @9.8' (3m)
230 LUX 21 FC @13.1' (4m)
148 LUX 14 FC @16.4' (5m)

EFFECTS

Individual Pixel Control
Strobe and Zone Chase Effects
Selectable Dimming Curves

COLOR

Warm White 3,200K

CONTROL / CONNECTIONS

(6) DMX Channel Modes (1 / 2 / 5 / 6 / 8 / 10)
RDM (Remote Device Management)
4 Button Touch Control Panel
3pin/5pin DMX In/Out
powerCON Power In/Out

SIZE / WEIGHT

Length: 21.6" (550mm)
Width: 6.4" (161.2mm)
Vertical Height: 6.8" (172.5mm)
Weight: 13.9 lbs. (6.3 kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
123W Max Power Consumption
14°F to 113°F (-10°C to 45°C)

APPROVALS / RATINGS

CE | cETLus | IP20


INSTALLATION

Rigging: Clamps (Not Included)
Working Position: Any (360°)

INCLUDED ITEMS


powerCON Cable

PHOTOMETRIC DATA

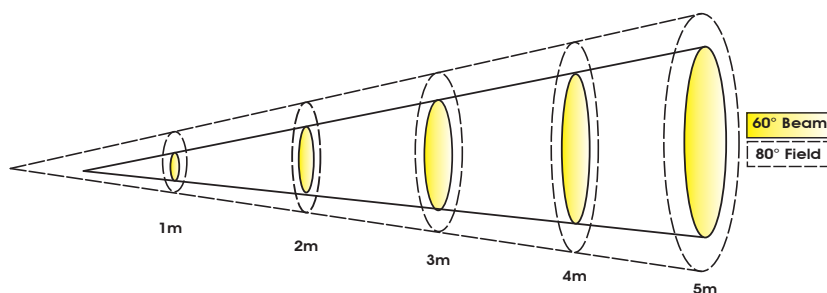

	1 m	3.3 ft	2 m	6.6 ft	3 m	9.8 ft	4 m	13.1 ft	5 m	16.4 ft
60° Beam Diameter	1.7	5.6	2.4	7.9	3.5	11.5	4.6	15.1	5.8	19.0
80° Field Diameter	2.2	7.2	3.4	11.2	5	16.4	6.7	22.0	8.4	27.6
	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
FULL ON	2,990	278	813	76	500	46	230	21	148	14

DIMENSIONAL DIAGRAMS

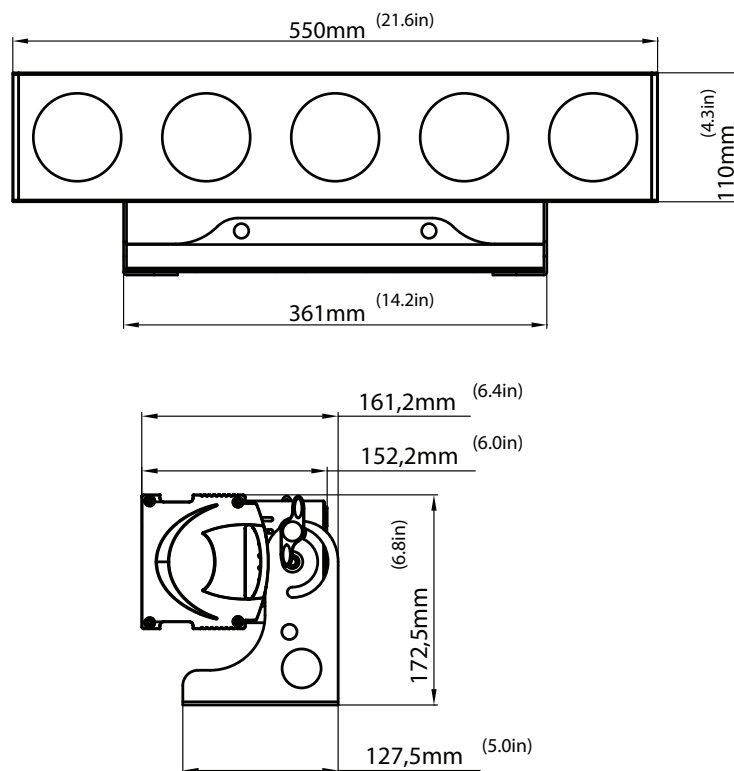

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
CUE283/15LK	CUEPIX Strip TRI & WW 15 Degree Lens Kit
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
EWDMSYSTEM	Wireless DMX System (1 Transmitter, 1 Receiver)
PLC3	3' (1m) PowerCON PRO Link Cable
AC3PDMX5PRO	5 ft. (1.5m) 3pin PRO DMX Cable
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
	Additional cable lengths available