



## VOLT Q5™

SKU# VOL053

The new IP65 rated Volt Q5™ features (5) 15W QUAD color RGBW LEDs, 7° beam 13° field angles, 180°+ manual LED head positioning, variable color correction (2,700K - 7,200K), magnetic frost filter gel frame, electronic strobe and dimming, flicker free operation for TV and FILM, rugged die-cast aluminum exterior, rubber padded base, retractable carrying handle, an internal wireless EWDMX receiver, and powered by a rechargeable Lithium-Ion battery.

### FEATURES

- IP65 Rated**
- 7° Beam 13° Field Angles**
- (5) 15W QUAD Color RGBW LEDs**
- 180°+ Manual LED Head Positioning**
- Variable Color Correction (2,700K - 7,200K)**
- Magnetic Frost Filter Gel Frame**
- Electronic Strobe and Dimming**
- Internal Wireless EWDMX Receiver**
- Rechargeable Lithium-Ion Battery**
- Flicker Free Operation for TV and FILM**
- Rugged Die-Cast Aluminum Exterior**
- Rubber Padded Base and Retractable Carrying Handle**



Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

**PRODUCT SPECIFICATIONS**

**FEATURES**

- IP65 Rated
- 7° Beam and 13° Field Angles
- 180°+ Manual LED Head Positioning
- Variable Color Correction (2,700K - 7,200K)
- Internal Wireless EWDMMX Receiver
- Rechargeable Lithium-Ion Battery
- Flicker Free Operation for TV and FILM
- Rugged Die-Cast Aluminum Exterior
- Rubber Padded Base and Retractable Carrying Handle

**SOURCE**

- (5) 15W QUAD Color RGBW LEDs
- 100,000 Hour Average Life

**PHOTOMETRIC DATA**

16,130 LUX 1,498 FC @6.6 ft (2m) (7° Full ON)

**EFFECTS**

- Variable Color Correction (2,700K - 7,200K)
- Magnetic Frost Filter Gel Frame
- Electronic Strobe and Dimming
- Multiple Color and Chase Macros

**CONTROL / CONNECTIONS**

- (4) DMX Channel Modes (4 / 5 / 7 / 9)
- Internal Wireless EWDMMX Receiver
- (4) Button Control Panel
- LCD Menu Display
- 3pin IP DMX In/Out
- 2pin IP Power Charger In

**SIZE / WEIGHT (single unit)**

- Length: 11.4" (290mm)
- Width: 9.9" (252mm)
- Vertical Height: 11.4" (289mm)
- Weight: 17.0 lbs. (7.7 kg)

**ELECTRICAL / THERMAL**

- DC 22-26.2V
- 65W Max Power Consumption (each unit)
- 14°F to 113°F (-10°C to 45°C)

**APPROVALS / RATINGS**

CE | cETLus | IP65


**INSTALLATION**

- Rigging: Clamps (Not Included) / Floor
- Working Position: Any (360°)

**INCLUDED ITEMS**

- (1) Volt Q5 26.2 VDC Charger + IEC Power Cable
- (1) Volt Series 3pin IP Data Link Cable
- (1) Volt Series 3pin IP to 3pin DMX Data Input Cable
- (1) Magnetic Frost Filter
- (1) Omega Bracket
- (1) Safety Cable


**PHOTOMETRIC DATA**

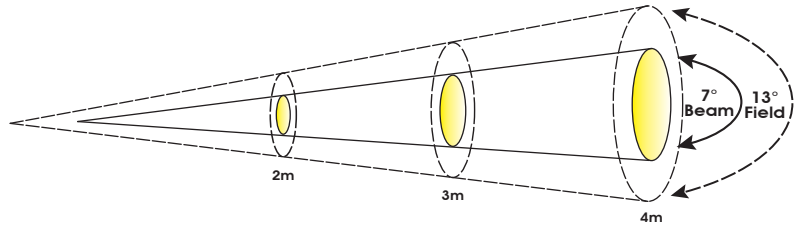

Distance	m	ft	m	ft	m	ft
7° Beam Diameter	0.26	0.9	0.38	1.2	0.52	1.7
13° Field Diameter	0.47	1.5	0.68	2.2	0.91	3.0

Photometrics	lux	fc	lux	fc	lux	fc
RED LEDs	2,700	251	1,254	116	690	64
GREEN LEDs	6,700	622	3,095	288	1,731	161
BLUE LEDs	800	74	380	35	214	20
WHITE LEDs	7,907	735	3,670	341	2,054	191
FULL ON	16,130	1,498	7,260	674	4,072	378

**DIMENSIONAL DIAGRAMS**

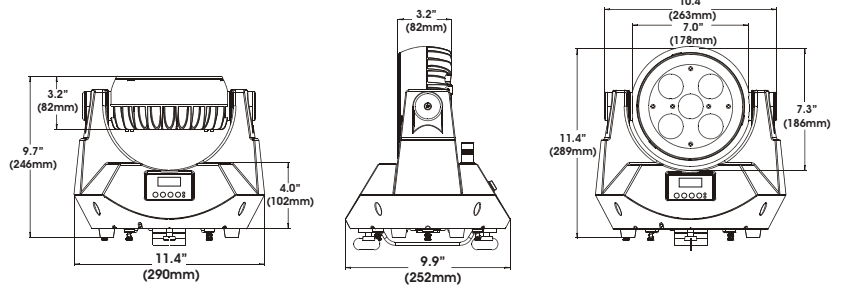

**OPTIONAL ACCESSORIES**

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
EWD001	EWDMMX IP Wireless IP65 DMX Transceiver
VOLTSCHARGER	Volt Q5 26.2 VDC Charger + IEC Power Cable
VOLT/3MDLC	Volt Series 9.8 ft (3m) 3pin IP Male to 3pin IP Female DATA LINK Cable
VOLT/DIAC	Volt Series 9.8 ft (3m) 3pin IP Female to 3pin DMX Male DATA INPUT Cable
VOLT/DOAC	Volt Series 9.8 ft (3m) 3pin IP Female to 3pin DMX Female DATA Output Cable

