



# Opti 30 UV

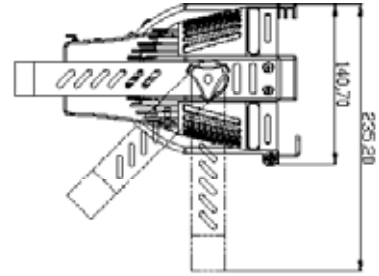

The Opti 30 UV by elation Professional is a Opti Par 30 with 12x 1W UV LEDs. This unit features sturdy high-impact aluminum construction. The peak wavelength is 390~410nm. The Opti 30 UV produces a standard beam angle of 25° and is equipped with a 3-pin DMX connection. This unit also features very low power consumption and very low heat output. Rigging for the Opti 30 UV includes double hanging brackets.

## FEATURES

- 12 x 1-Watt UV LEDs
- Peak wavelength 390~410 nm
- Sturdy, high-impact aluminum construction
- Manual or DMX Operation
- Internal Multi-voltage PSU
- Digital DMX display
- 2 DMX channels: Intensity and Strobe
- Very low power consumption
- Very low heat output
- Beam angle: 25°
- cETLus pending



## TECHNICAL SPECIFICATIONS

- **DMX Channels:** 2 DMX channels: Intensity and Strobe
- **Control:** 3-pin DMX connection
- **Dimmer:** 0 - 100% dimming
- **Power Supply:** Multi-voltage operation: AC 100~240V /47~63Hz
- **Cable / Plug Type:** Cable included (No Plug)
- **Approvals:** cETLus pending
- **Lamp:** 12 x 1-Watt UV LEDs,
- **Lamp Life:** Long-life LEDs (30,000 hr. life)
- **Power Consumption:** 20 Watts max
- **Dimensions:** (LxWxH) 10" x 7.25" 5.75" / 250 x 185 x 145mm (not incl. hanging bracket)
- **Weight:** 5.3 lbs. / 2.4 kg.
- **Rigging:** Double hanging brackets  
– may be set on the floor

## DMX TRAITS

Channel	Value	Function
1	0 - 255	Master Dimmer 0% - 100%
2	0 - 255	Strobing Slow - Fast