

ALPHA SPOT HPE 1500


I DIAGRAMMI FOTOMETRICI
GB PHOTOMETRIC DIAGRAMMS
F DIAGRAMMES PHOTOMETRIQUES

D FOTOMETRICHE DIAGRAMME
E DIAGRAMOS FOTOMÉTRICOS

Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.
Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.
Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.
Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausseuchtung.
Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.


Minimum Zoom (9.5°)

Total Output: 24000 lumens - Full Power Mode (1500 W)

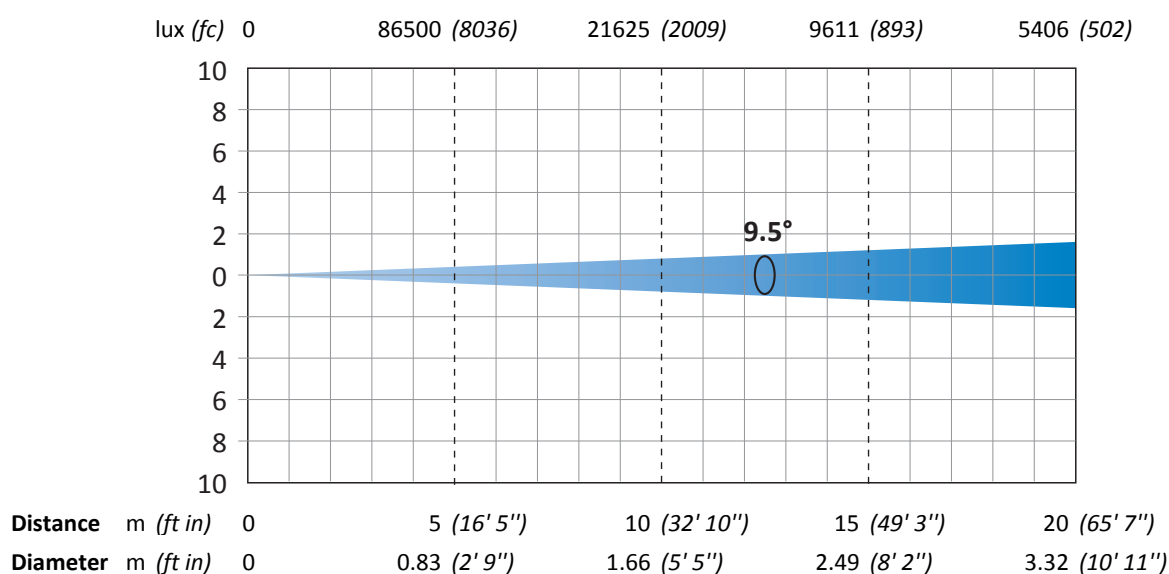

Maximum Zoom (56.4°)

Total Output: 27000 lumens - Full Power Mode (1500 W)

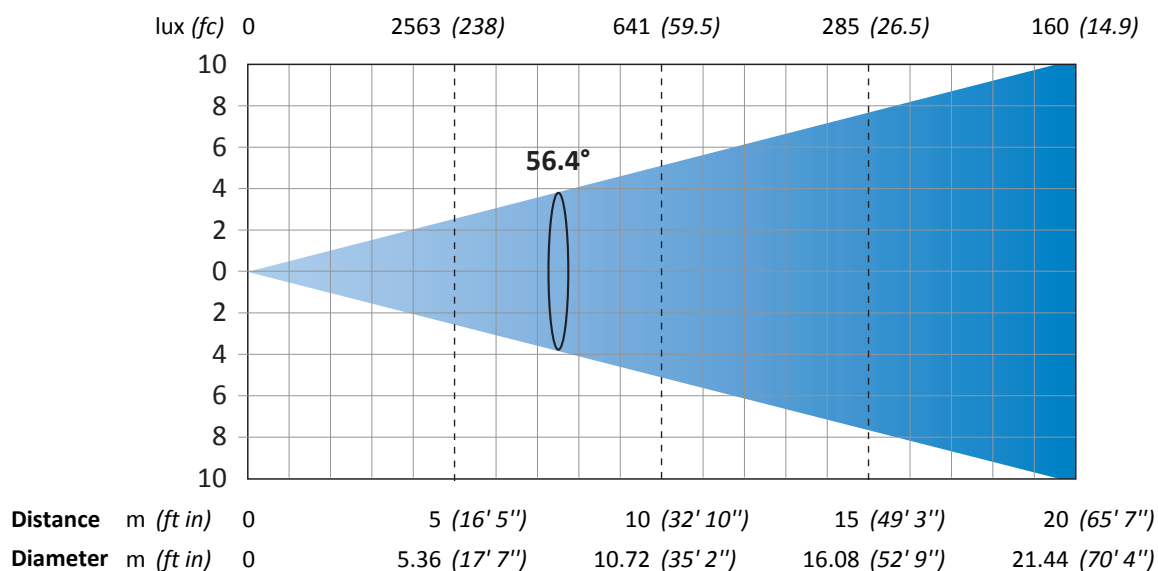


ALPHA SPOT HPE 1500


- I** DIAGRAMMI FOTOMETRICI
- GB** PHOTOMETRIC DIAGRAMMS
- F** DIAGRAMMES PHOTOMETRIQUES

- D** FOTOMETRICHE DIAGRAMME
- E** DIAGRAMOS FOTOMÉTRICOS

Minimum Zoom with Frost (11.6° 10% - 6.8° 50%) Total Output: 12000 lumens - Full Power Mode (1500 W)

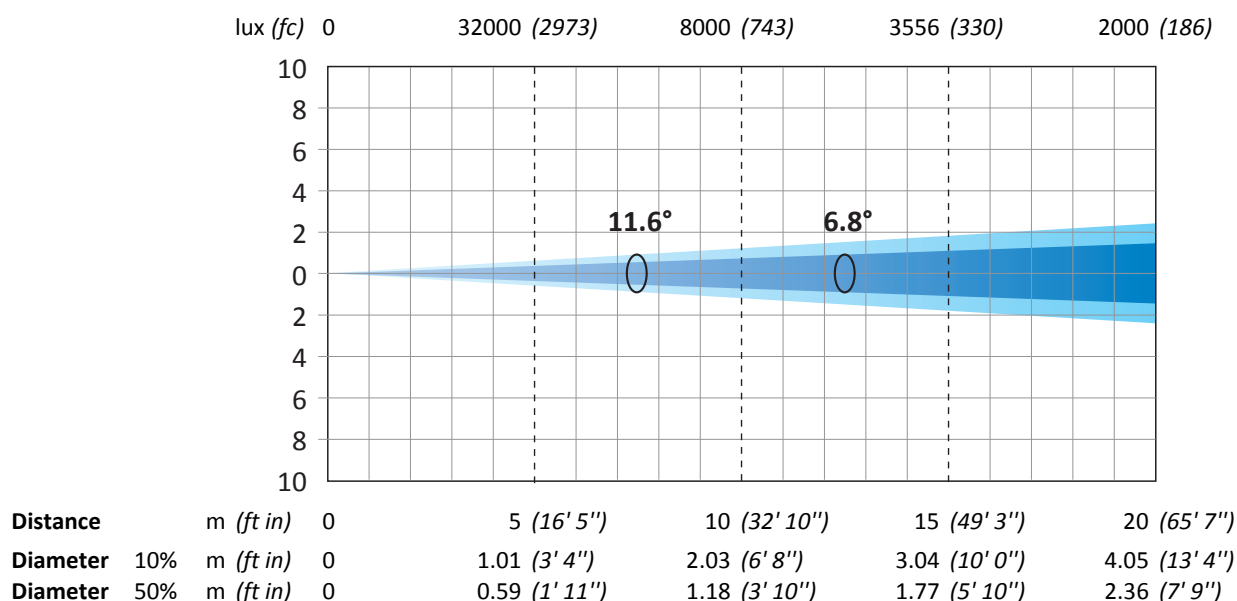

Maximum Zoom with Frost (63.8° 10% - 40.1° 50%) Total Output: 20000 lumens - Full Power Mode (1500 W)

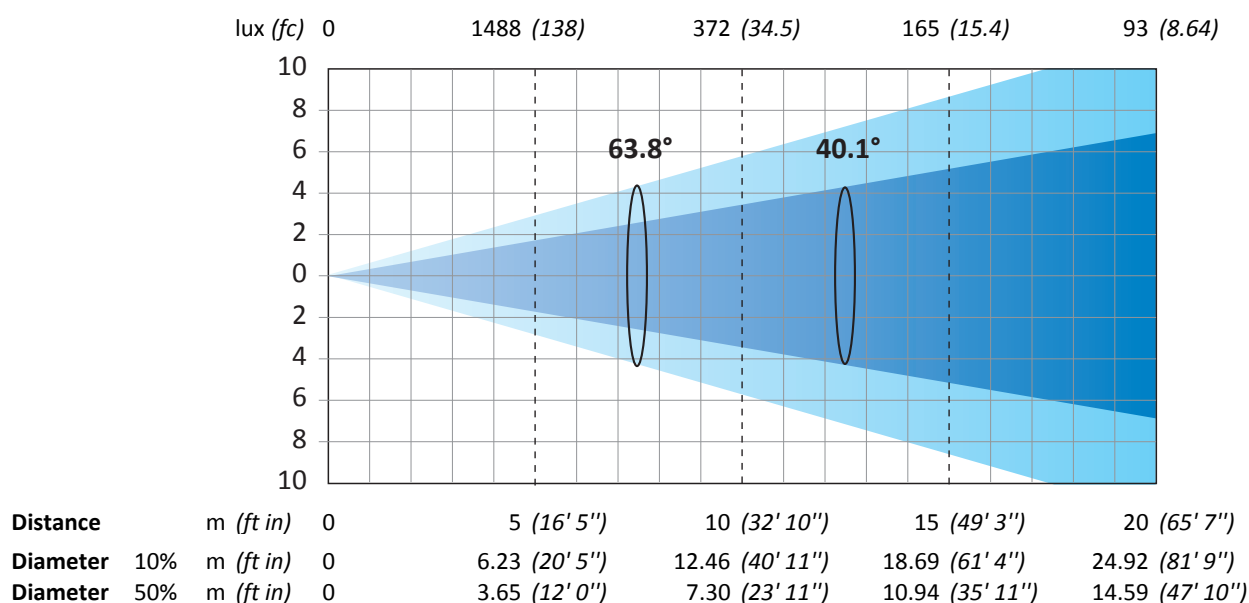


ALPHA SPOT HPE 1500

- I** DIAGRAMMI FOTOMETRICI
- GB** PHOTOMETRIC DIAGRAMMS
- F** DIAGRAMMES PHOTOMETRIQUES

- D** FOTOMETRICHE DIAGRAMME
- E** DIAGRAMOS FOTOMÉTRICOS


Minimum Zoom in extra-run (6.9°)

Full Power Mode (1500 W)

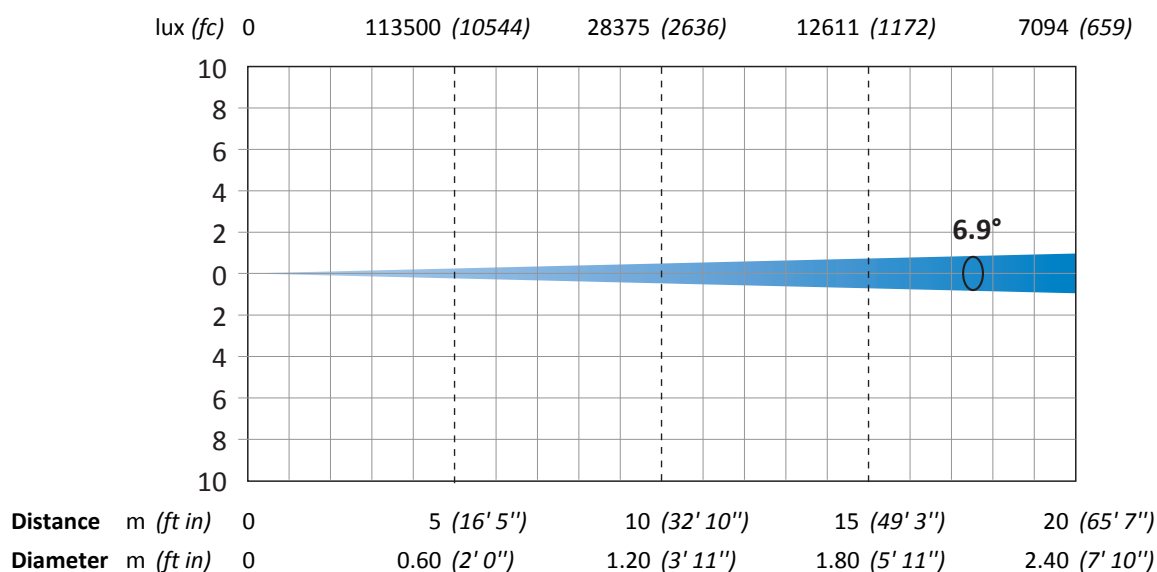

Minimum Zoom in extra-run with Frost (8.5° 10% - 4.7° 50%)

Full Power Mode (1500 W)

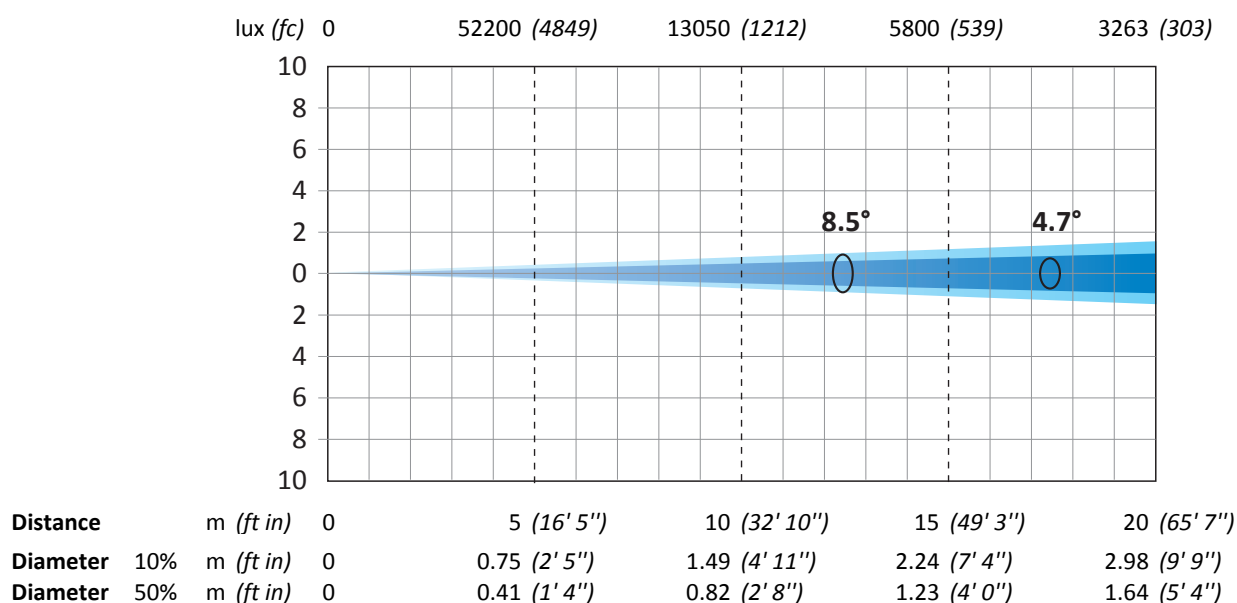

ALPHA SPOT HPE 1500

- I** DIAGRAMMI FOTOMETRICI
- GB** PHOTOMETRIC DIAGRAMMS
- F** DIAGRAMMES PHOTOMETRIQUES

- D** FOTOMETRICHE DIAGRAMME
- E** DIAGRAMOS FOTOMÉTRICOS

