


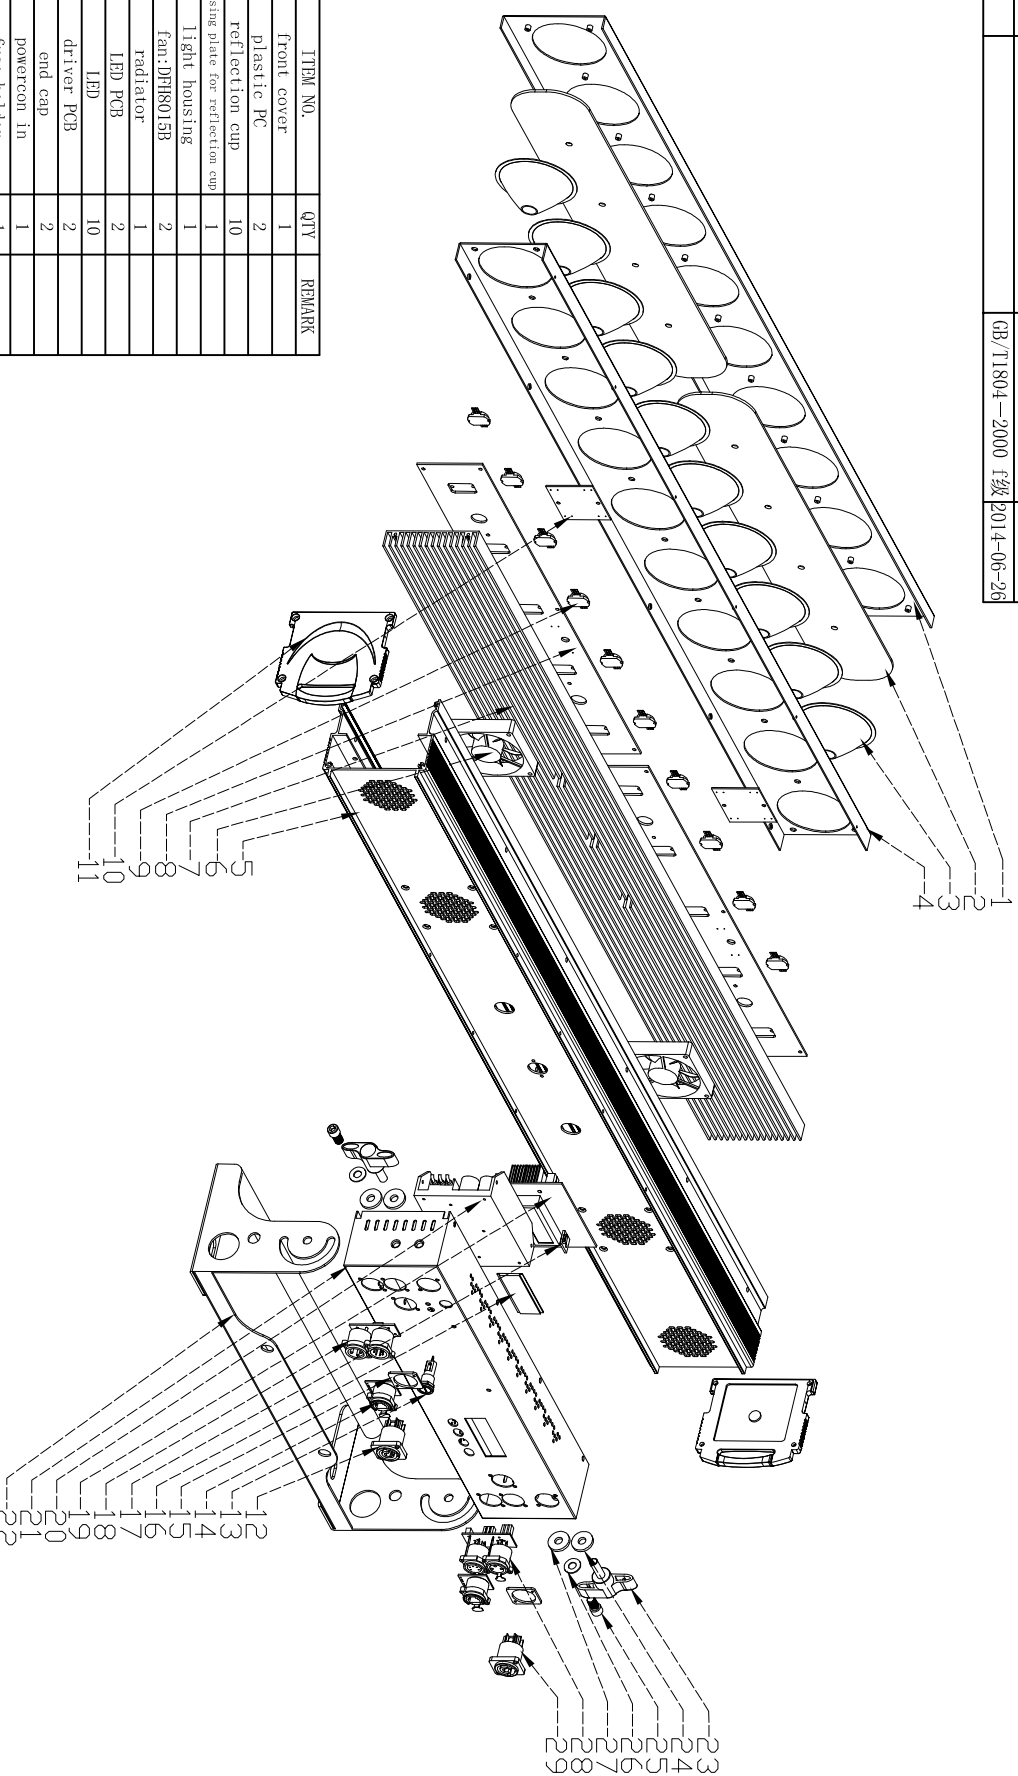

SN	DRAWL NO.	ITEM NO.	QTY	REMARK
1	LA3426-02	front cover	1	
2	LA3401-03	plastic PC	2	
3	LA3404-21	reflection cup	10	
4	LA3426-03	pressing plate for reflection cup	1	
5	LA3426-01	light housing	1	
6	LA-WG-025	fan:DPH8015B	2	
7	LA3426-06	radiator	1	
8	LA3426-03C	LED PCB	2	
9	TA-M80100180P-001A-2-4	LED	10	
10	LA3723-01B	driver PCB	2	
11	LA3401-06	end cap	2	
12	LA-WG-008	powercon in	1	
13	LA-WG-007	fuse holder	1	
14	LARJ45-03A	RJ45 connection plug	2	
15	LA3401-10	pressing plate	2	
16	LA-WG-004	PC for display	1	
17	LA1125-04C	temp. control PCB	1	
18	LADMX-11A	3P-5P NLR socket with PCB (m)	1	
19	LA3402-02B	display PCB	1	
20	K18-UP400S12	power supply	1	
21	LA3426-04	back cover	1	
22	LA3426-05	bracket	1	
23	LA3155-28A-03	"S" knob (M8×25)	2	
24	LA-WG-012	Φ22×Φ8×3 rubber washer	2	
25	LA-WG-010	M8×20 inner hexagon screw	2	
26	LA-WG-011	Φ17×Φ8×1 flat washer	2	
27	LADMX-003	Φ50×Φ10×3 rubber washer	2	
28	LADMX-10A	3P-5P NLR sockets with PCB (out)	1	
29	LA-WG-006	powercon out	1	
30				

GB/T1804—2000 线性尺寸的极限偏差数值				
范围 (mm)	0.5~3	3~6	6~30	30~120
f (精密)	±0.05	±0.05	±0.1	±0.15
m (中等)	±0.1	±0.1	±0.2	±0.3
c (粗糙)	±0.2	±0.3	±0.5	±0.8
v (最粗)	±0.5	±1	±1.5	±2.5

名称	折 弯	折弯角	喷 漆 厚 度
尺寸范围 (mm)	0~50	50~300	>15°
未注公差 (mm)	±0.1	±0.25	±1°

广州鹏林照明灯具有限公司



制图	黄俊杰	2014-06-26	图号	LA3426-BZ-00	数量	1	材料	组件
核对			名称	产品爆炸图	涂复		比例	1:1/CAD
审核			电脑	LA3426-BZ-00	版 本			00
批准			文件	LA3426-BZ-00	第 1 页 / 共 1 页			