



SNIPER 2R™

SKU# SNI550

Fast, precise and powerful the new Sniper 2R™ is a revolutionary new hybrid effects projector, scanner and laser simulator which features new lamp technology, the MSD Platinum 2R Lamp at 132 Watts / 6,000 hours. Capable of producing powerful and precise beam and laser like effects - including liquid sky, laser wave and cones, all moving at speeds never seen before. The main functions include a X / Y scan and Z rotation mirror system, 3 facet rotating prism, variable speed shutter / dimmer / strobe, 14 dichroic colors, 17 static gobos including beam reduction gobos, 5pin DMX and powerCON in/out connections, (4) button control panel, 220W max power consumption, and a multi-voltage universal auto switching power supply (120-240v).

FEATURES

Multi Effect Luminaire, Beam, Scanner, Laser Simulator

132W Phillips™ Platinum 2R Lamp

3° Precision Beam

3 Facet Rotating Prism

Liquid Sky, Laser Wave and Cone Effects

X / Y and Z High-Speed Mirror System

(14) Dichroic Colors + White

(17) Static Gobos



ELATION | SNIPER 2R™ | Product Specification Sheet

Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

PRODUCT SPECIFICATIONS

FEATURES

Multi Effect Luminaire, Beam, Scanner, Laser Simulator
 3° Precision Beam
 3 Facet Rotating Prism
 X / Y and Z High-Speed Mirror System

SOURCE

132W Platinum 2R Lamp
 6,000 Hour Average Life

PHOTOMETRIC DATA

Measured with 3° Beam Full On
 45,010 LUX 4,181 FC @16.4' (5m)
 12,050 LUX 1,119 FC @32.8' (10m)
 5,633 LUX 523 FC @49.2' (15m)
 3,178 LUX 295 FC @65.6' (20m)
 2,276 LUX 212 FC @82.0' (25m)

EFFECTS

Strobe
 Electronic Dimmer
 3 Facet Rotating Prism
 Multiple Pattern Macros

COLOR

(14) Dichroic Colors + White

GOBOS

(17) Gobos + Open

CONTROL / CONNECTIONS

(4) DMX Channel Modes (14 / 16 / 18 / 20)
 4 Button Control Panel
 5pin DMX In/Out
 powerCON In/Out

SIZE / WEIGHT

Length: 14.2" (361mm)
 Width: 12.0" (305mm)
 Vertical Height: 11.6" (295mm)
 Weight: 21.0 lbs. (9,5 kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
 220W Max Power Consumption
 Multiple Unit Power Linking (max 7 @120V / 14 @230V)
 104°F (40°C) Max Ambient Temperature

APPROVALS / RATINGS

CE | cETLus | IP20


INSTALLATION

Rigging: Clamps (Not Included)
 Working Position: Any (360°)


INCLUDED ITEMS

(1) Adjustable Mounting Yoke
 (1) powerCON Cable


PHOTOMETRIC DATA

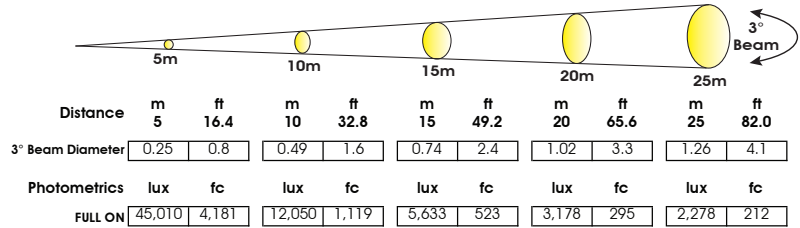

COLORS AND GOBOS

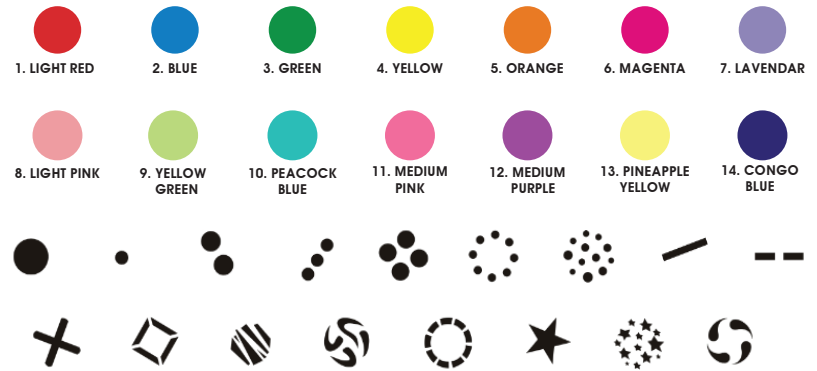

DIMENSIONAL DIAGRAMS

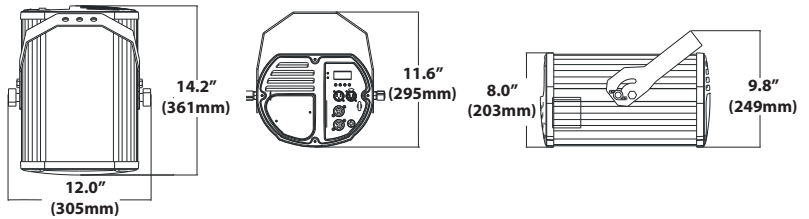

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
DRCSNIPER	Six-Pack Road Case For Sniper 2R™
EWDMXSYSTEM	Wireless DMX System (1 Transmitter, 1 Receiver)
EWDMXT	Wireless DMX Transmitter
EWDMXR	Wireless DMX Receiver
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
AC5PDMX10PRO	10 ft. (3m) 5pin PRO DMX Cable
PLC3	3' (1m) PowerCON PRO Link Cable
PLC6	6' (1.8m) PowerCON PRO Link Cable
	Additional cable lengths available.

